

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/057332 A1

(51) International Patent Classification⁷: G01N 33/53,
33/543

(21) International Application Number:
PCT/IB2002/005607

(22) International Filing Date:
23 December 2002 (23.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): COUN-
CIL OF SCIENTIFIC AND INDUSTRIAL RE-
SEARCH [IN/IN]; Rafi Marg, New Delhi 110 001 (IN).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SURI, Chander, Ra-
man [IN/IN]; Institute of Microbial Technology, Chandi-
garh (IN). RAJE, Manoj [IN/IN]; Institute of Microbial

Technology, Chandigarh (IN). VARSHNEY, Grish, Chan-
dra [IN/IN]; Institute of Microbial Technology, Chandi-
garh (IN).


(74) Agents: SUBRAMANIAM, Hariharan et al.; Subrama-
niam, Nataraj & Associates, E-556, Greater Kailash II,
New Delhi 110 048 (IN).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,
YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: MICROPOROUS FILTRATION BASED DOT IMMUNOASSAY DEVICE FOR METHOD FOR SCREENING OF
ANALYTES AND METHOD OF USE

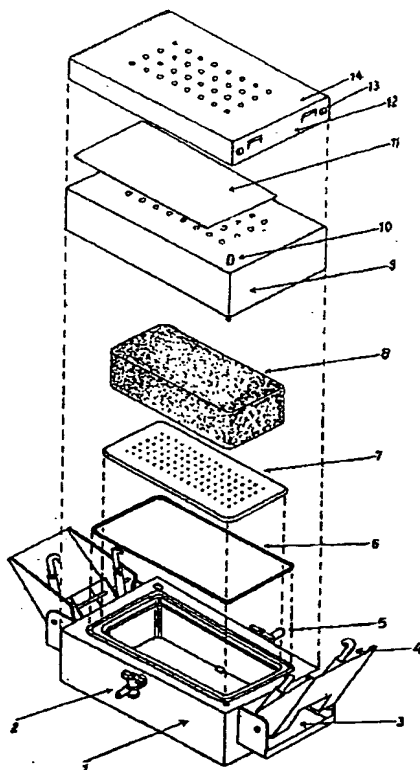

(57) Abstract: The present invention is based on rapid displacement of solvents under mild vacuum in solution-solid phase reaction of immunocomplex [Ijsselmuiden et al., J. Immunol. Methods, 6 (1989): 35]. In the present invention, this is achieved by a microporous absorbing pad upon which a nitrocellulose transfer membrane is placed. The absorbing pad under mild vacuum generated/regulated by running tap effectively filters out the unbound ligand and rinsing solutions through transfer membrane, thus enhancing the reaction kinetics of immunocomplex. This mechanism, in turn reduces the incubation steps of antibody-antigen reaction from hours to few minutes, allowing total assay time in less than 20 minutes.

WO 2004/057332 A1



ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report

MICROPOROUS FILTRATION BASED DOT IMMUNOASSAY DEVICE FOR METHOD FOR SCREENING OF ANALYTES AND METHOD OF USE

Field of the invention

5 The present invention relates to an efficient and improved device for the screening of analytes using a microporous filtration based dot immunoassay method. More particularly this invention is based on the rapid solvent displacement method using a microporous pad. The invention is applicable for rapid screening of samples such as pesticides, hormones, and proteins with the ability of testing multiple samples in a single run. The device can be used
10 for testing in all types of field conditions as it is extremely handy, versatile, efficient, self contained, and meets with the prime objective of this invention to develop an improved dot blot method for rapid immunoscreening of substances in samples with the ability of testing multiple samples in a single run.

Background of the invention

15 In prior art immunofiltration system developed by Pierce Corporation, USA wherein its Easy-Titer Enzyme linked immunofiltration assay kit (Immunofiltration Apparatus, Pierce catalogue, page: O-186) the solvent displacement is achieved by electrically operated vacuum pump. This makes it non-usable in remote locations having no access to electricity.

Objects of the invention

20 The main objective of the present invention is to have a device for screening of analytes using a microporous filtration based dot immunoassay method.

Another objective of the present invention is to make this device efficient, effective, handy and operable in all kinds of field conditions.

Summary of the invention

25 The principle of the present invention is based on rapid displacement of solvents under mild vacuum in solution-solid phase reaction of immunocomplex [Ijsselmuiden et al., J. Immunol. Methods, 6 (1989): 35]. In the present invention, this is achieved by a microporous absorbing pad upon which a nitrocellulose transfer membrane is placed. The absorbing pad under mild vacuum generated/regulated by running tap effectively filters out the unbound
30 ligand and rinsing solutions through transfer membrane, thus enhancing the reaction kinetics of immunocomplex. This mechanism, in turn reduces the incubation steps of antibody-antigen reaction from hours to few minutes, allowing total assay time in less than 20 minutes.

Accordingly the present invention provides a microporous filtration based dot immunoassay device for screening of analytes, said device comprising three independent
35 housings comprising of two upper housings and one lower housing, a transfer membrane, a

microporous pad sandwiched between two upper housings, a polymer mesh placed over the lower housing, a seal means.

In one embodiment of the invention, the three housings comprise of one piece acrylic polymer sheet.

5 In another embodiment of the invention, wherein the transfer membrane is a nitrocellulose sheet.

In another embodiment of the invention, the absorbing pad is a high density polymeric sponge.

10 In another embodiment of the invention, the two upper housings have 32 holes each corresponding exactly to each other and all three housings are connected firmly through external connecting means.

In another embodiment of the invention, the seal means is an O ring.

In another embodiment of the invention, the analyte comprises of small molecules selected from small molecules of pesticides, proteins and hormones.

15 The present invention also relates to a method for microporous filtration dot immunoassay using a device comprising comprising three independent housings comprising of two upper housings and one lower housing, a transfer membrane, a microporous pad sandwiched between two upper housings, a polymer mesh placed over the lower housing, a seal means, said method comprising immobilizing a complimentary ligand to the analyte
20 sample on the polymer mesh, adding a tracer along with the sample to each well, and then adding a substrate thereto, the enzyme tracer bound to membrane being converted to a colored product by a substrate and thereby functioning as an indicator of the proportion of the micromolecule in the sample.

25 In one embodiment of the invention, the color reaction of the tracer is stopped by means of a vacuum.

In another embodiment of the invention, the vacuum is generated through a running water tap.

In another embodiment of the invention, the analyte comprises small molecules selected from pesticides, hormones and proteins.

30 Accordingly, the present invention relates to a device for the screening of molecules using a microporous filtration based dot immunoassay method; such device being capable to screen multiple samples in a single run.

Brief description of the accompanying drawings

Figure 1 is a schematic representation of the device of the invention.

Detailed description of the invention

The features and advantages of the invention will be more apparent from the following more particular description of the device, as illustrated in the accompanying drawing. The drawing is not necessarily to the scale, emphasis instead being placed upon illustrating the principles of the invention.

In this screening device the nitrocellulose membrane contains the bound complimentary ligand (anti-pesticide antibody) immobilized on it. The sample containing pesticide competes with an enzyme bound pesticide derivative (tracer) for the available antibody binding sites. The more the pesticide concentration in a sample, the less enzyme tracer available for antibody binding sites. The enzyme tracer bound to membrane is converted to a colored product by a substrate. The developed color is an indicator, which is inversely proportional to pesticide concentration in the sample.

The screening device consists of three separate housings (1, 9 and 12) each made of one-piece acrylic polymer (Perspex) sheet as shown in Figure 1. The transfer membrane (11) placed over the microporous pad (8) is sandwiched between the upper and the middle housings (9 and 12). The microporous pad is supported on a perspex mesh (7), which is placed over the lower housing (1) sealed via a silicon ring (6). The upper housing (12) contains 32 holes with silicon O-rings at bottom for blocking sample leakage. All three housings are held together via guided pins (10) and spring-loaded clamps (3, 4). The vacuum generated and regulated from running tap is connected to main system via vacuum line (2).

The other advantage of this device, unlike the existing method, is effective displacement of unbound ligand uniformly throughout the membrane surface by putting a microporous absorbing pad under the transfer membrane. The process of the present invention, hereby makes it very handy, portable, and does not require any power connection. It generates vacuum through running water, and only a few reagents are required for color development, and therefore most appropriate for every possible field application.

A further description of the invention is given in example below, which should not however be construed to limit the scope of the present invention unless otherwise stated.

Example 1: Screening of smaller pesticide molecules (2,4-dichlorophenoxyacetic acid

The nitrocellulose transfer membrane placed between upper two Perspex housings is spotted with 10 μ l of anti-2, 4-D antibody solution made in phosphate buffer saline (150 mM, pH 7.4)) in each well. The membrane is kept for incubation for 5 minutes, and dried under the mild vacuum (~ 0.25 kg/cm²). 100 μ l PBS containing 0.5% Tween 20 (PBST) is then added to each well under same vacuum for removing unbound antibody molecules from membrane.

The different concentrations of pesticide sample (1 ppb to 1 ppm) mixed with the enzyme tracer (pesticide-HRP) are added to each well and rinsed under mild vacuum. After rinsing again with PBST, the substrate (tetramethylbenzidine/H₂O₂) is added into each well to generate the color. The color reaction is stopped with water, which is then rinsed under mild vacuum. The intensity of color developed, inversely proportional to pesticide concentration in samples, is semi-quantified by comparing with standard test strip.

Example 2: Screening of protein molecules, serum albumin in samples

The nitrocellulose transfer membrane is spotted with 10 µl of anti-BSA (bovine serum albumin) antibody solution made in phosphate buffer saline (PBS) in each well, kept for incubation for 5 minutes, and dried under the mild vacuum (~ 0.25 kg/cm²). 100 µl PBS containing 0.5% Tween 20 (PBST) is then added to each well under same vacuum for removing unbound antibody molecules from membrane. The different concentrations of BSA (1 ng/ml to 1 µg/ml) made in phosphate buffer are added to each well and rinsed under mild vacuum. After rinsing with PBST, the second antibody (goat-anti-BSA) labelled with HRP (1:20,000 dilution) was added into each well. After rinsing again with PBST, substrate (tetramethylbenzidine/H₂O₂) is added into each well. The color reaction is stopped with water, which is then rinsed under mild vacuum. The intensity of color developed, directly proportional to pesticide concentration is semi-quantified with a standard test strip.

We claim

1. A microporous filtration based dot immunoassay device for screening of analytes, said device comprising three independent housings comprising of two upper housings and one lower housing, a transfer membrane, a microporous pad sandwiched between two upper
5 housings, a polymer mesh placed over the lower housing, a seal means.
2. A device as claimed in claim 1 wherein the three housings comprise of one piece acrylic polymer sheet.
3. A device as claimed in claim 1 wherein the transfer membrane is a nitrocellulose sheet.
4. A device as claimed in claim 1 wherein the absorbing pad is a high density polymeric
10 sponge.
5. A device as claimed in claim 1 wherein the two upper housings have 32 holes each corresponding exactly to each other and all three housings are connected firmly through external connecting means.
6. A device as claimed in claim 1 wherein the seal means is an O ring.
- 15 7. A device as claimed in claim 1 wherein the analyte comprises of small molecules selected from small molecules of pesticides, proteins and hormones.
8. A method for microporous filtration dot immunoassay using a device comprising comprising three independent housings comprising of two upper housings and one lower housing, a transfer membrane, a microporous pad sandwiched between two upper
20 housings, a polymer mesh placed over the lower housing, a seal means, said method comprising immobilizing a complimentary ligand to the analyte sample on the polymer mesh, adding a tracer along with the sample to each well, and then adding a substrate thereto, the enzyme tracer bound to membrane being converted to a colored product by a substrate and thereby functioning as an indicator of the proportion of the micromolecule
25 in the sample.
9. A method as claimed in claim 1 wherein the color reaction of the tracer is stopped by means of a vacuum.
10. A method as claimed in claim 1 wherein the vacuum is generated through a running water tap.
- 30 11. A method as claimed in claim 1 wherein the analyte comprises small molecules selected from pesticides, hormones and proteins.

1/1

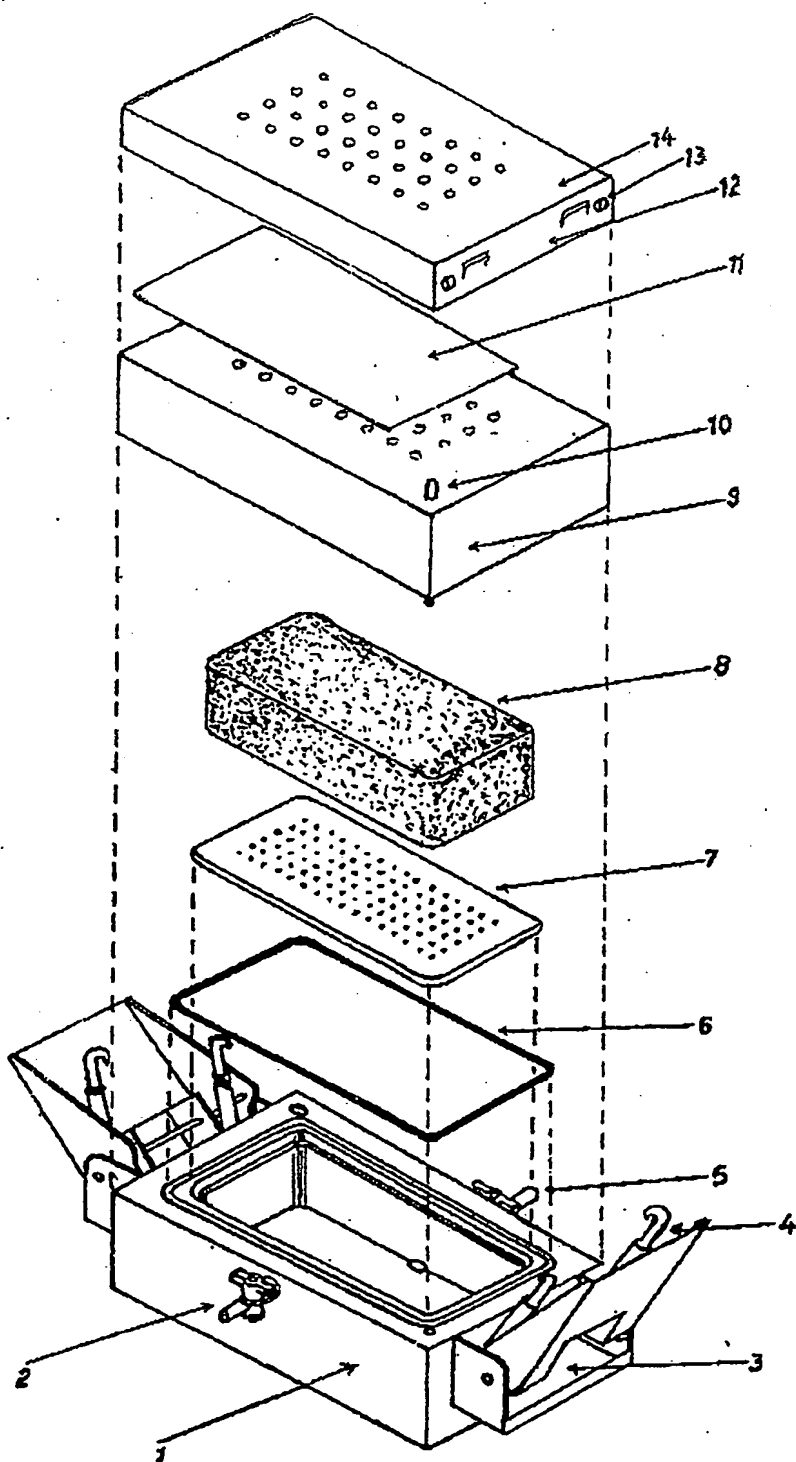


FIGURE 1

INTERNATIONAL SEARCH REPORT

Inter. Appl. No.
PCT/IB 02/05607

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01N33/53 G01N33/543

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 675 299 A (WITTY ET AL) 23 June 1987 (1987-06-23) claims 1-21	1-11
A	IJSSELMUIDEN, O.E.: "Optimising the solid-phase immunofiltration assay" JOURNAL OF IMMUNOLOGICAL METHODS, vol. 119, no. 6, 1989, pages 35-43, XP009010519 cited in the application page 35 -page 37	1-11
A	EP 0 439 017 A (SANGSTAT MEDICAL CORPORATION) 7 August 1991 (1991-08-07) the whole document	1-11
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

28 May 2003

Date of mailing of the international search report

05/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Moreno de Vega, C

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB 02/05607

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 913 791 A (BIOS CORPORATION) 3 April 1990 (1990-04-03) the whole document ----	1-11
A	US 5 503 741 A (PIERCE CHEMICAL COMPANY) 2 April 1996 (1996-04-02) the whole document -----	1-11

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB 02/05607

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4675299	A	23-06-1987	US 4608231 A	26-08-1986
			ZA 8505774 A	28-05-1986
EP 0439017	A	31-07-1991	US 5049164 A	17-09-1991
			AU 625043 B2	25-06-1992
			AU 6863291 A	11-07-1991
			CA 2033608 A1	06-07-1991
			CA 2033608 C	03-05-1994
			DE 69115511 D1	01-02-1996
			DE 69115511 T2	25-07-1996
			EP 0439017 A1	31-07-1991
			NO 910034 A	08-07-1991
US 4913791	A	03-04-1990	US 4812216 A	14-03-1989
			DE 3875575 D1	03-12-1992
			EP 0309303 A2	29-03-1989
			JP 1091049 A	10-04-1989
US 5503741	A	02-04-1996	AT 191366 T	15-04-2000
			AU 7839294 A	10-04-1995
			CA 2170738 A1	30-03-1995
			DE 69423901 D1	11-05-2000
			DE 69423901 T2	26-10-2000
			EP 0720508 A1	10-07-1996
			ES 2147242 T3	01-09-2000
			JP 10507960 T	04-08-1998
			PT 720508 T	29-09-2000
			WO 9508385 A1	30-03-1995